




simplex truealert Disassembly

how to take apart a simplex truealert

Written By: Alex




Step 1 — Remove cover clips

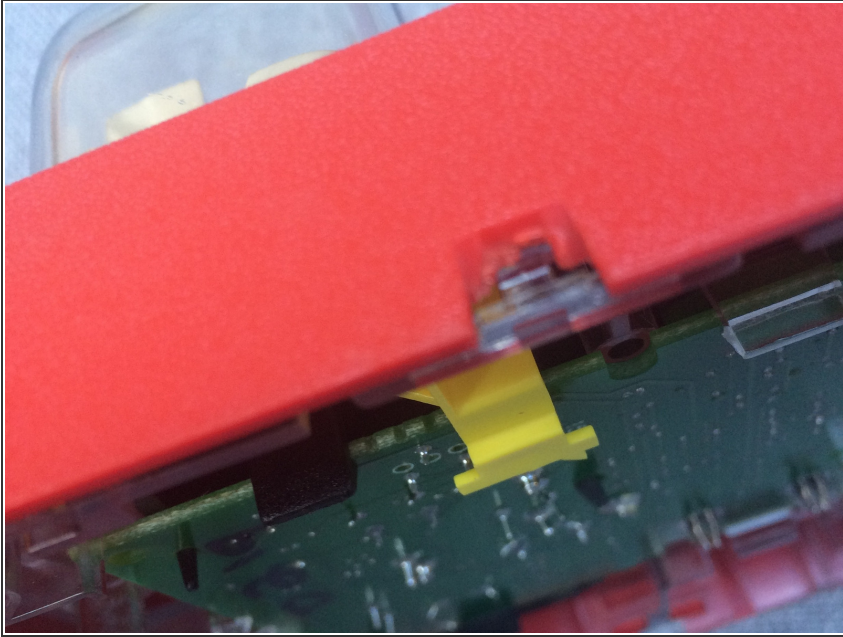


- Insert wisdom here.

Step 2 — Remove cover

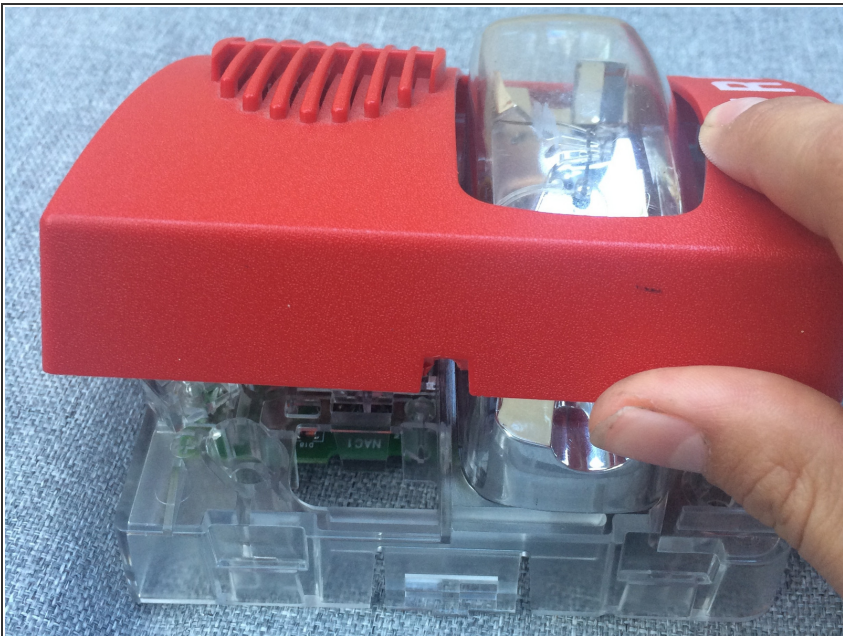


- Insert wisdom here.

Step 3 — Remove brightness switch

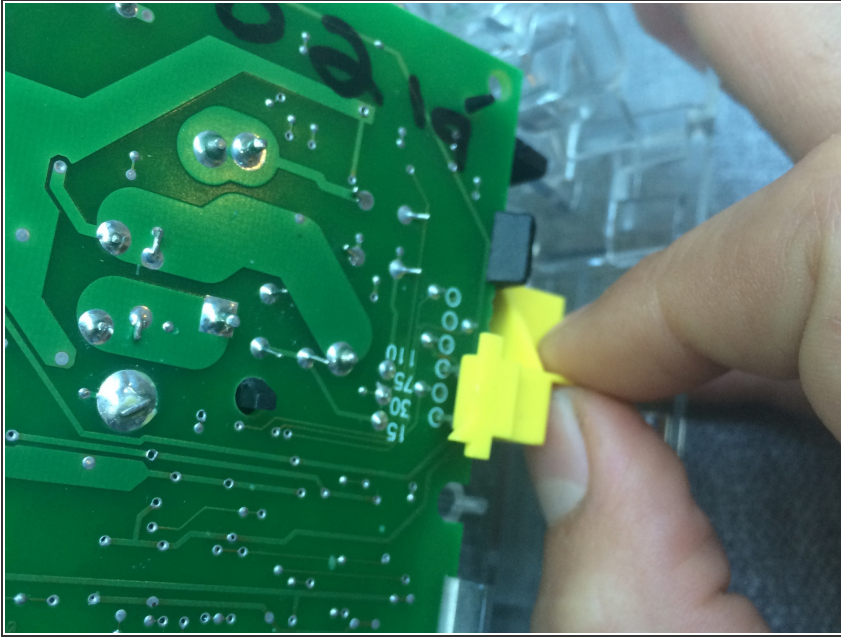


- Insert wisdom here.

Step 4 — Remove circuit board clips

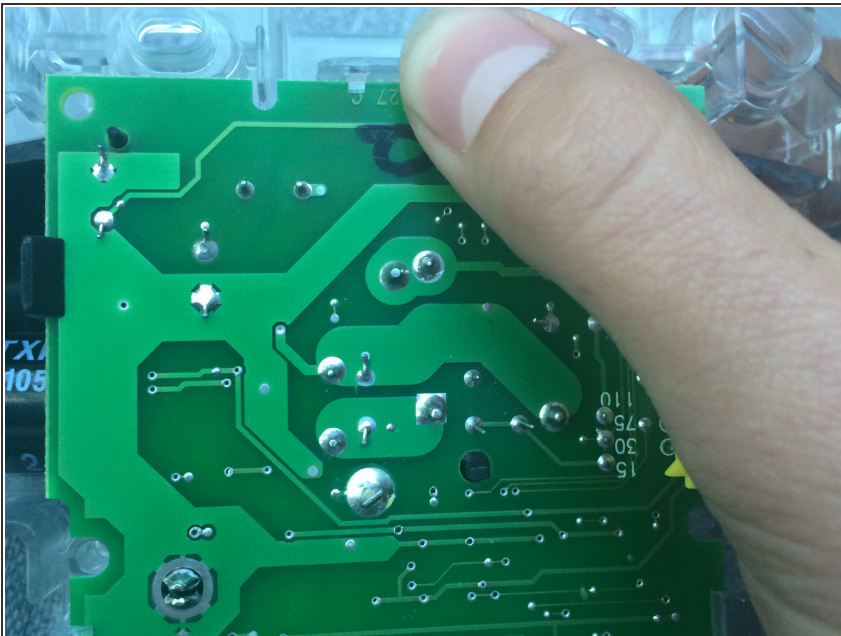


- Insert wisdom here.

Step 5 — Lift circuit board

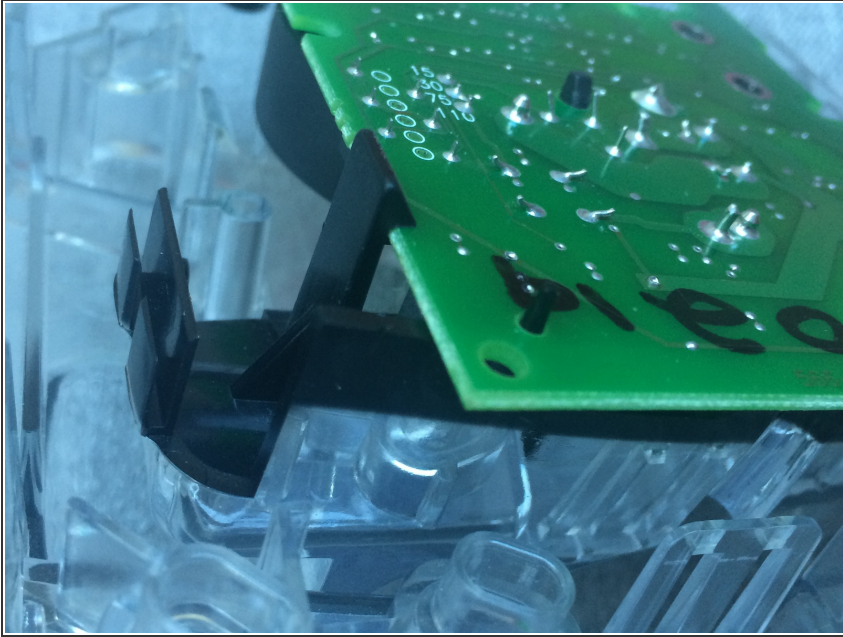


- Insert wisdom here.

Step 6 — Remove strobe tube

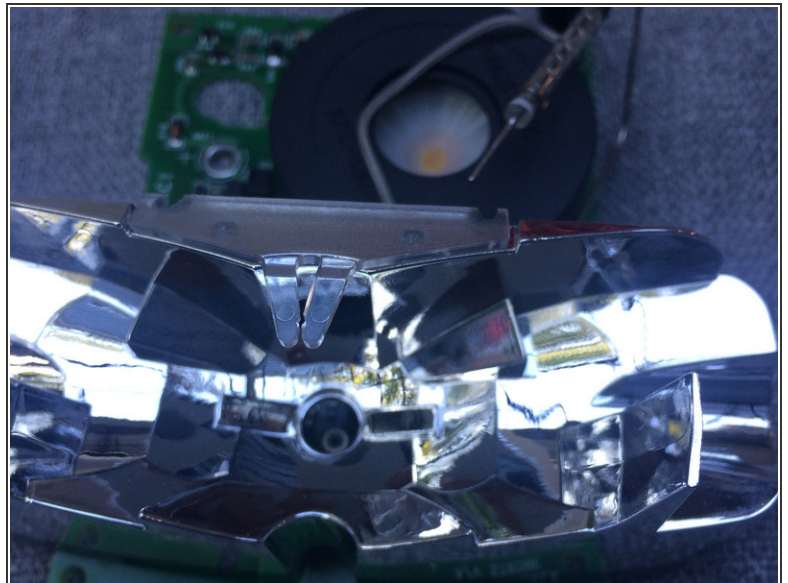


- Don't break the strobe tube

Step 7 — Remove plastic cover

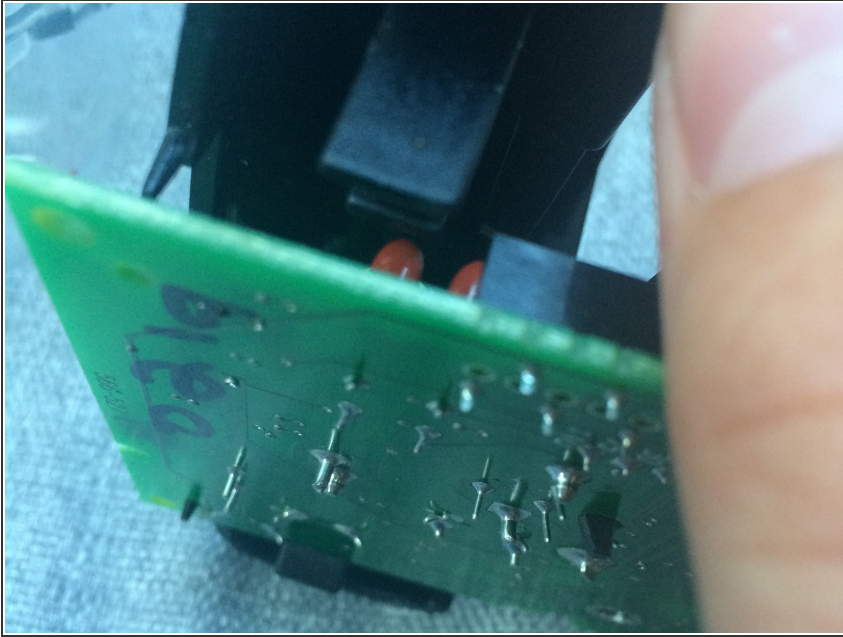

- Insert wisdom here.

Step 8 — Done!

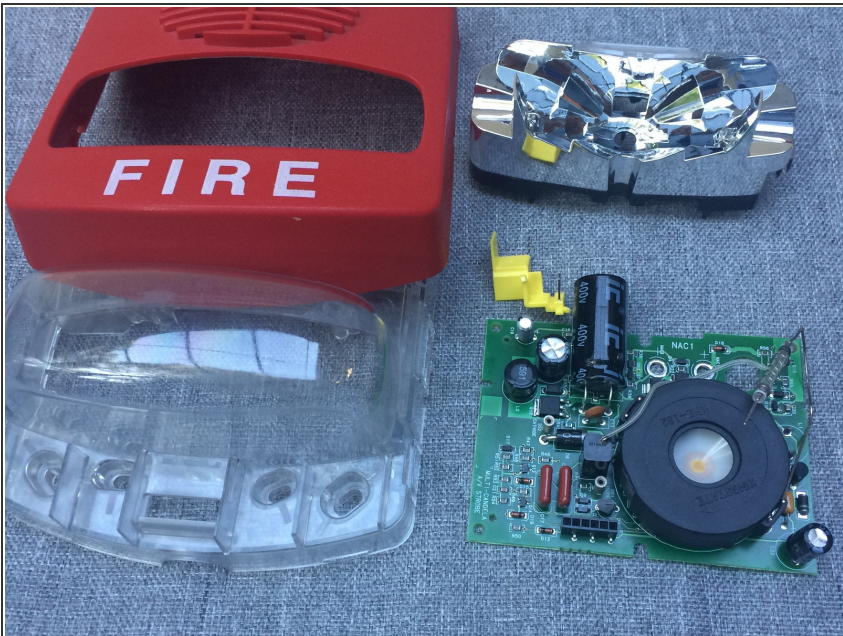

- Insert wisdom here.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-17 06:56:18 AM.